



Марка Mark	Сечение Section			Прочные свойства Supporting force			Марка металла Steel grade	Примечания Note
	Эскиз Draft	Поз. item	Состав Composition	M, тм t m	N, т t	0,1 т t		
C1	□		Гн.□80х5				C235	
C2	□		Гн.□140х5				C235	
C3	□		□10t				C245	
C4	□		Гн.□100х6				C235	
C5	□		□20x1				C235	
B1	□		□20x1				C245	
B2	□		Гн.□140х5			0.43	C235	
B3	□		Гн.□80х5			0.50	C235	
B4	□		□30x1			0.60	C245	
B5	□		□10t				C245	
B6	□		□40x1			2.33	C245	
CB1	□		Гн.□200х6		45.0		C235	
CB2	□		□75х6				C245	
CC1	□		□50х5				C245	

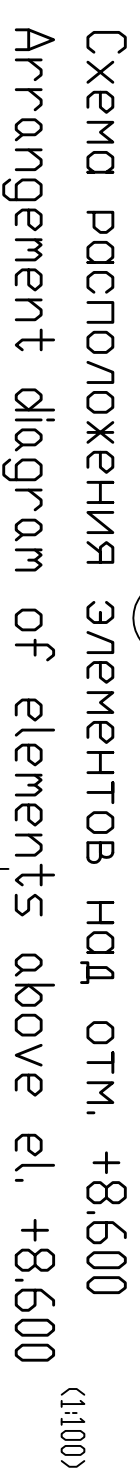

Марка Mark	Сечение Section			Прочные свойства Supporting force			Марка металла Steel grade	Примечания Note
	Эскиз Draft	Поз. item	Состав Composition	M, тм t m	N, т t	0,1 т t		
C1	□		Гн.□80х5				C235	
C2	□		Гн.□140х5				C235	
C3	□		□10t				C245	
C4	□		Гн.□100х6				C235	
C5	□		□20x1				C235	
B1	□		□20x1				C245	
B2	□		Гн.□140х5			0.43	C235	
B3	□		Гн.□80х5			0.50	C235	
B4	□		□30x1			0.60	C245	
B5	□		□10t				C245	
B6	□		□40x1			2.33	C245	
CB1	□		Гн.□200х6		45.0		C235	
CB2	□		□75х6				C245	
CC1	□		□50х5				C245	



- 1 For general instruction see sheet of general data BG3-300HA-###-CN-01-10-001.
2 All bent square beams should have plugs t4 C235 on ends.

[illegible]